

Development of a large area gas photomultiplier with GEM/ μ PIC

H. Sekiya

*Kamioka Observatory, Institute for Cosmic Ray Research, University of Tokyo
456 Higashi-Mozumi, Kamioka, Hida, Gifu, 506-1205 JAPAN*

We are developing a new photon detector with micro pattern gaseous detectors. A semitransparent CsI photocathode is combined with 10cm $\times$ 10cm GEM/ μ PIC for the first prototype which is aimed for the large liquid Xe detectors. Using Ar+C₂H₆ (10%) gas, we achieved the gas gain of 10⁵ which is enough to detect single photoelectron. We, then, irradiated UV photons from a newly developed solid scintillator, LaF₃(Nd), to the detector and successfully detected single photoelectron.

1. INTRODUCTION

In the last two decades, many gaseous photomultipliers with CsI photocathodes operated in both flushed gas mode and sealed gas mode have been developed and tested[1, 2, 3]. Moreover, recently, large area micro pattern gaseous detectors with avalanche multiplication structures, such as Micromegas[4], GEM[5], and μ PIC[6] have been developed and successfully operated. These devices with photocathodes can realize a low cost large area photon detector with position sensitivity and can be applied to large astroparticle detectors. In particular, the quantum efficiency of the CsI photocathode matches the liquid Xe scintillator, thus dark matter search via Xe is one of the first targets of this photon detector.

In this work, for the first step, we investigated the feasibility of manufacturing a large size gaseous photon detector with CsI photocathode and evaluated its performance.

2. THE DETECTOR

The configuration of the prototype detector is shown schematically in Fig. 1. 2 GEMs and a μ PIC were used for the charge amplification, which allows to suppress the avalanche-induced photon and ion feedback and provide the high gain operation.

The GEM which was manufactured by SciEnergy Co., Ltd. is 10cm $\times$ 10cm size with 70 μ m ϕ holes of 140 μ m pitch[7], and the insulator is Liquid Crystal Polymer of 100 μ m thick. The μ PIC is the standard type of 10cm $\times$ 10cm with 256 anode strips and 256 cathode strips developed at Kyoto University[6]. Although μ PIC has the very fine position sensitivity, for this prototype detector, the cathode strips and anode strips were summed into 4+4 channels to reduce the number of the readout circuit.

The MgF₂ window is 54mm ϕ and the thickness is 5mm. The CsI photocathode was evaporated to the window by Hamamatsu Photonics and the effective area is 34mm ϕ . In order to apply high voltage (-HV) to the photocathode an Al electrode was also evaporated at the edge of the MgF₂ window. The -HV is supplied to the electrode via contact Cu ring. Between the photocathode and the first GEM, a guard ring is placed in order to make a uniform electric field and to drift photoelectrons to the first GEM.

These devices are put in a stainless steel chamber with a gas/vacuum port, therefore, when the gas spoils, we can replace the gas and we can also exchange the other components. 1 atm of Ar+10%C₂H₆ mixture gas was loaded and the chamber was sealed during this measurement.

All the components given above are assembled in a nitrogen-sealed glove box to avoid the deliquescence of the CsI photocathode.

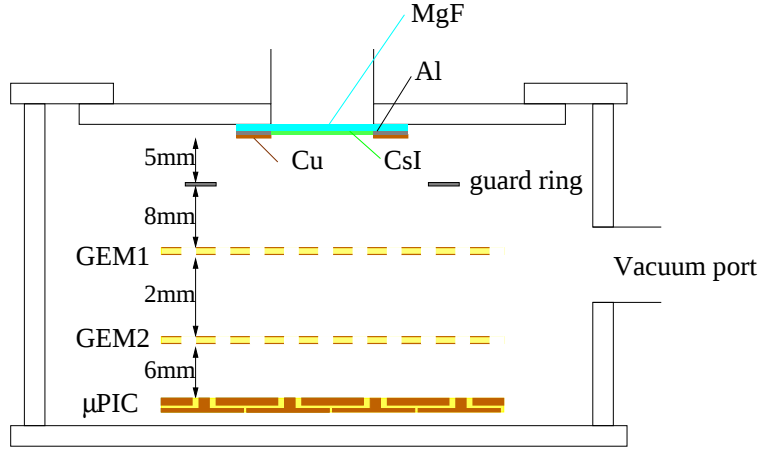


Figure 1: Schematic drawing of the prototype detector. The size of GEMs and μ PIC is 10cm $\times$ 10cm, while the diameter of the window is 54mm and the diameter of the effective area of the CsI photocathode is 34mm.

3. UV PHOTON SCINTILLATOR

The fluoride single crystals have a wide transparent range from the vacuum ultraviolet(VUV) to the infrared region, therefore, they are used in various applications such as the window material, the host material for the short wavelength laser and so on. Recently, several studies have been made on fluoride crystals with dopant as scintillators that might find their applications in γ /x-ray detection[8]. Although light yields of these crystals are rather limited at this point, because of their small light yields and easiness of handling, these crystals can be light sources for the prototype detector instead of liquid xenon.

It is known that the scintillation spectrum of the $\text{LaF}_3(\text{Nd})$ is agree with that of liquid Xe (the central wavelength is 172nm), however the absolute light yield of $\text{LaF}_3(\text{Nd})$ had not been measured yet.

Accordingly, we measured the light yields of 15mm $\times$ 15mm $\times$ 15mm size $\text{LaF}_3(\text{Nd})$ for the first step. The ^{241}Am (5.5MeV α source) was attached directly to one face of the crystal and the VUV sensitive PMT (Hamamatsu R8778) was attached to the opposite face. Other four sides were covered with GORE-TEX[®]. The obtained spectrum of 5.5MeV α through the $\text{LaF}_3(\text{Nd})$ is shown in Fig. 2.

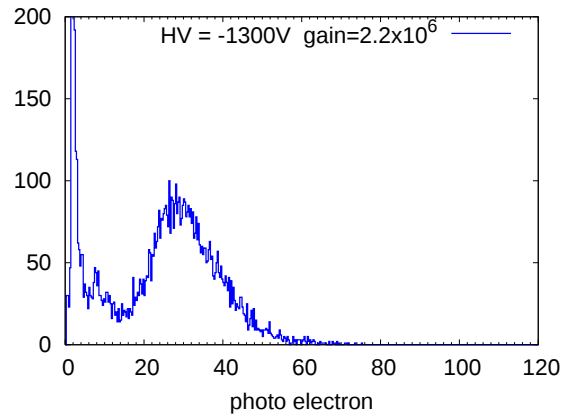


Figure 2: Obtained spectrum of 5.5MeV α through the $\text{LaF}_3(\text{Nd})$. The R8778 was operated with the gain of 2.2×10^6 .

As the quantum efficiency of the R8878 at 172nm is 30%, the photon yield of the $\text{LaF}_3(\text{Nd})$ was found to be 100 photons/5.5MeV α . We use this $\text{LaF}_3(\text{Nd}) + ^{241}\text{Am}$ as a test light source for the prototype detector.

4. RESPONSE TO THE VUV LIGHT SOURCE

Next, we attached the light source to the prototype detector. The detector was operated with the gas gain of 2.6×10^5 stably without any discharges more than one hour. The typical output signal after the 0.1V/pC charge amplifier and the obtained spectrum are shown in Fig. 3.

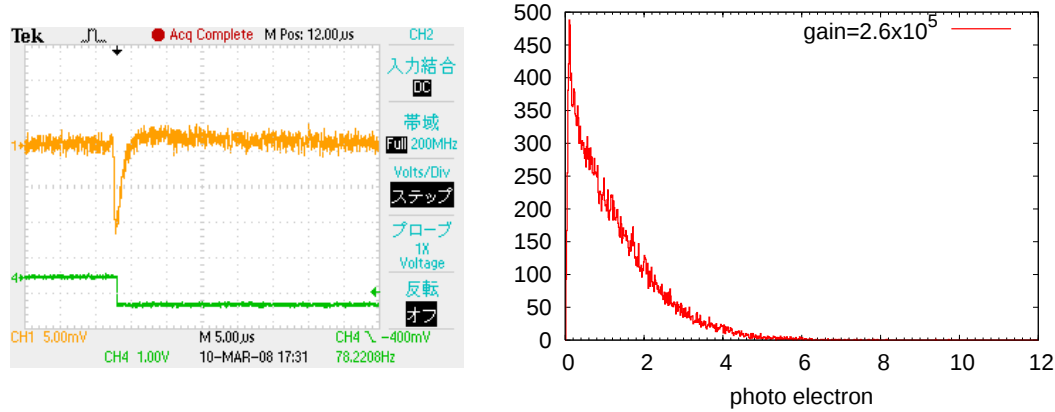


Figure 3: Left: Typical output signal after the 0.1V/pC charge amplifier. Right: The obtained spectrum. The detector was operated with the gain of 2.6×10^5 .

It is confirmed that this detector has enough sensitivity to single photo-electron. The quantum efficiency of this CsI photocathode is about 1% which is consistent with that in Hamamatsu's data sheet of the semitransparent CsI photocathode[9].

5. CONCLUSION AND PROSPECTS

A UV photon detector based a semitransparent CsI photocathode combined with large area GEMs and a μ PIC has been reported. It is demonstrated that the detector has the ability of detecting single photoelectron. The quantum efficiency is about 1% as expected.

In order to increase the quantum efficiency, a reflective type CsI photocathode (200nm-thick CsI evaporated to one side of the GEM) is being developed and tested now.

References

- [1] G. Charpak, et al., Proc. of Symp. on Particle Identification at High Luminosity Hadron Colliders, eds T. Gourlay and J. Morfin, Fermilab, Batavia, IL, (1989) 295
- [2] A. Berskin, et al., Nucl. Instr. and Meth. A 478 (2002) 225
- [3] P. Carlson, et al., Nucl. Instr. and Meth. A 502 (2003) 189
- [4] Y.G. Yiomataris, et al., Nucl. Instr. and Meth. A 376 (1996) 29
- [5] B. Ketzer, et al., Nucl. Instr. and Meth. A 535 (2004) 314; F. Sauli, et al., Nucl. Instr. and Meth. A 386 (1997) 531
- [6] A. Takada, et al., Nucl. Instr. and Meth. A 573 (2007) 195; T. Nagayoshi, et al., Nucl. Instr. and Meth. A 525 (2004) 20
- [7] <http://www.scienergy.jp>
- [8] M. Cadatal, et al., J. Opt. Soc. Am. B, 25, (2008) B27
- [9] "Photomultiplier Tubes" Catalog by Hamamatsu Photonics K.K, FEB. 2006 revised